

Weber UK Axle Stands


A comprehensive range of Commercial-Duty Axle Stands with various capacities from 2 Tonnes up to 24 Tonnes per pair incorporating the following height specifications:-

- Low (Pin/Chain and Screw-Type)
- Standard
- High
- Extra High
- Commercial Support Stands (Screw-Type)

All Weber Axle Stands are supplied passivated with zinc-plated support columns. Each model is fitted with base plates to ensure even distribution of the load.




STANDARD MODELS (Rated and sold in Pairs)

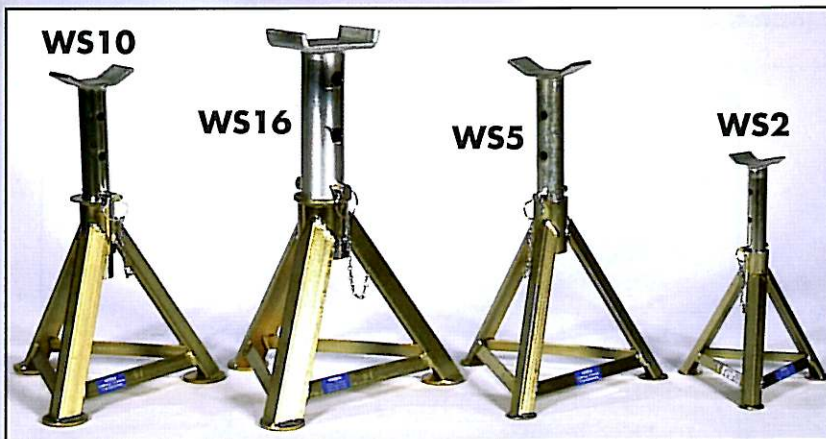

Model No	Capacity Per Pair Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WS2	2	255	400	5.4
WS5	5	350	560	10.7
WS10	10	360	615	14.3
WS16	16	370	615	20.0

HIGH MODELS (Rated and sold in Pairs)

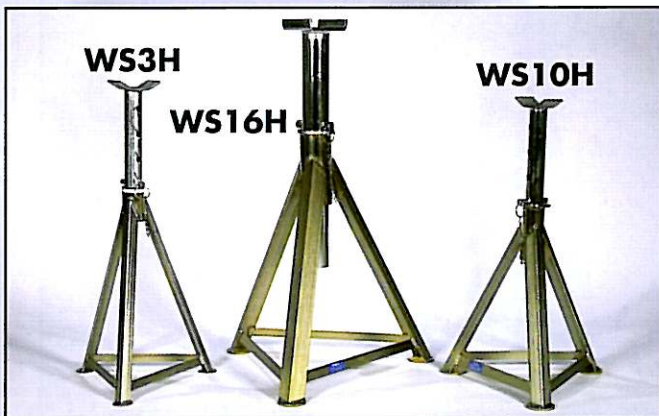


Model No	Capacity Per Pair Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WS3H	3	520	820	14.0
WS10H	10	520	770	17.0
WS16H	16	705	1110	36.0


LOW MODELS (Rated and sold in Pairs) Designed specifically for all Low-Entry applications

Model No	Capacity Per Pair Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WS24LS	24	200	290	19kg
WS24L	24	300	500	20kg



WS24LS (Screw-Type)

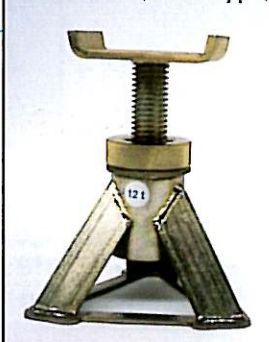

WS24L (Pin/Chain)

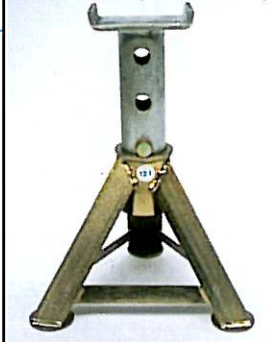

Axle Stands

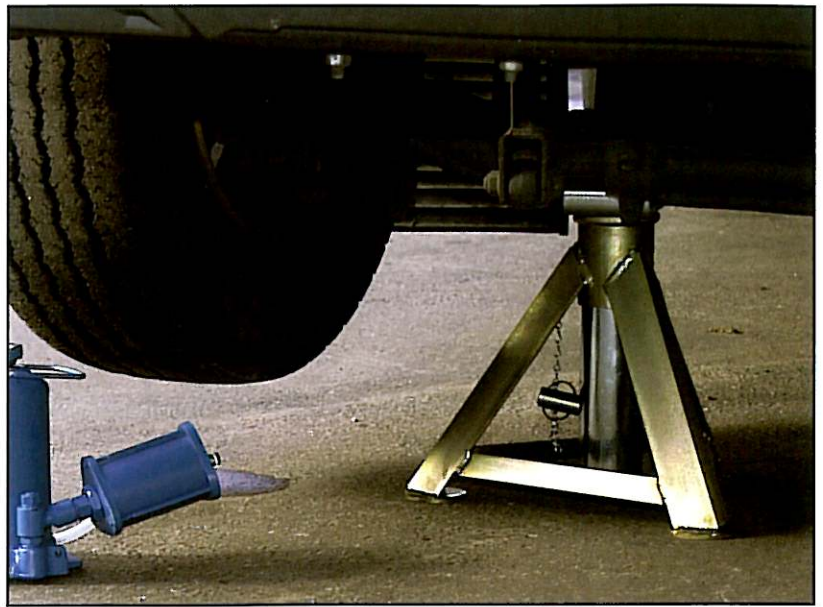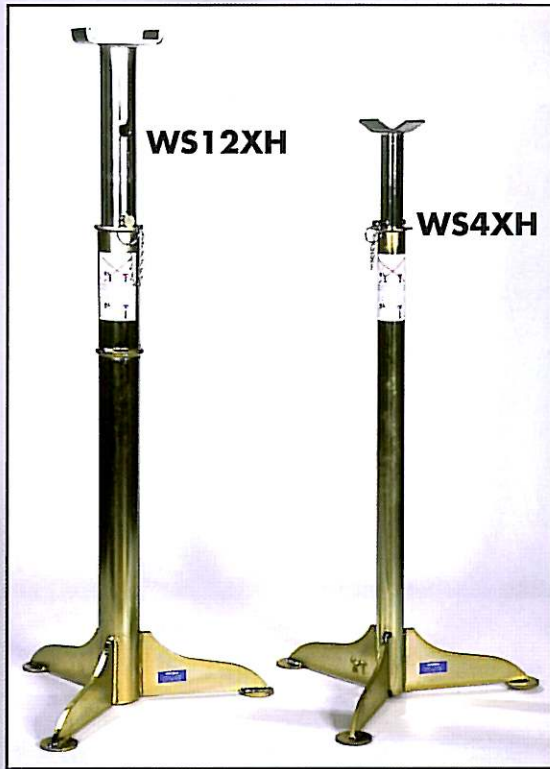

EXTRA-HIGH MODELS
(Chassis Stands)
(Rated and sold in Pairs)

Model No	Capacity Per Pair Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WS4XH	4	1041	1803	31.3
WS12XH	12	1035	1778	46.5

COMMERCIAL-DUTY SCREW TYPE SUPPORT STANDS

Suitable for use with Mobile Column Lifts
(Rated and sold in Single Units)

FEATURES

- 6 Tonnes (Per Stand)
- Designed for Heavy-Duty applications
- Passivated finish for protection
- 100% Screw Adjustment - secured in any position
- Fitted with Transporter Wheels for manoeuvrability

Model No	Capacity Per Stand Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WSC6L (LOW)	6 Per Stand	850	1450	45.0
WSC6H (HIGH)	6 Per Stand	1460	2080	51.0

